




www.itc-funi.com
Funi metalliche
e accessori.

REDANCE THIMBLE

Ed. 21 • 2006




REDANCIA THIMBLE

DIN EN 13411-1 (DIN 3090)

material: St 37-2

Zincata / Galvanized

Campi di utilizzo / Operative range:
Funi industriali / Rope industry

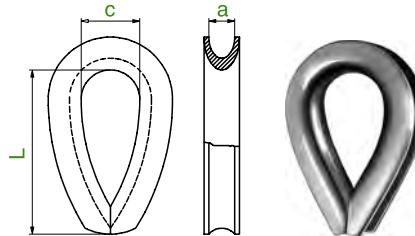

Codice	∅	a	L	c	Kg/%
RDDNZ309004	4	5	29	10	1,20
RDDNZ309006	6	7	42	15	2,80
RDDNZ309008	8	9	56	20	5,70
RDDNZ309010	10	11	70	25	15,20
RDDNZ309012	12	13	85	30	24,00
RDDNZ309014	14	16	102	35	38,00
RDDNZ309016	16	18	113	40	52,00
RDDNZ309018	18	20	127	45	66,00
RDDNZ309020	20	22	141	50	88,00
RDDNZ309022	22	24	153	55	104,00
RDDNZ309024	24	26	165	60	129,00
RDDNZ309026	26	29	181	65	260,00
RDDNZ309028	28	31	193	70	277,00
RDDNZ309032	32	35	223	80	440,00
RDDNZ309036	36	40	247	90	460,00
RDDNZ309040	40	44	281	100	700,00
RDDNZ309044	44	48	305	110	1000,00
RDDNZ309048	48	53	329	120	1200,00


Uffici e Magazzino /
Offices and Warehouse
Via al Dos dela Roda - 38057
Z.I. Ciré di Pergine (TN) - Italy
Phone/Tel. +39 0461.538299
Fax +39 0461.539375
EMail: info@itc-funi.com
www.itc-funi.com

REDANCIA THIMBLE

DIN 65457 (DIN 6899 form A)

Zincata / Galvanized

Campi di utilizzo / Operative range:
Funi industriali / Rope industry

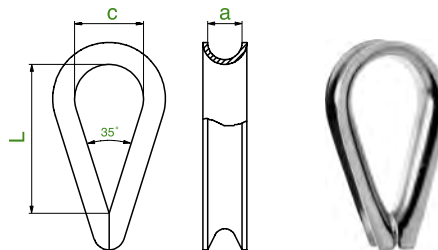

Codice	∅	a	L	c	Kg/%
RDDZ6545725	2,5	3,0	21,5	10	0,14
RDDZ6545703	3,0	3,5	23,5	11	0,35
RDDZ6545735	3,5	4,0	26,5	12	0,38
RDDZ6545704	4,0	5,0	28,5	13	0,42
RDDZ6545705	5,0	6,0	30,0	14	0,80
RDDZ6545706	6,0	7,0	33,0	15	0,81
RDDZ6545707	7,0	8,0	35,0	16	1,10
RDDZ6545708	8,0	9,0	39,0	18	1,70
RDDZ6545709	9,0	10,0	43,0	20	2,10
RDDZ6545710	10,0	11,0	47,5	22	3,50
RDDZ6545711	11,0	12,0	51,5	24	3,70
RDDZ6545712	12,0	13,0	56,5	26	5,25
RDDZ6545713	13,0	14,0	61,0	28	7,25
RDDZ6545715	15,0	16,0	69,5	32	8,33
RDDZ6545716	16,0	18,0	78,0	35	17,90
RDDZ6545718	18,0	20,0	86,5	40	27,00
RDDZ6545720	20,0	22,0	95,0	44	35,50
RDDZ6545724	24/26,0	26,0	105,0	48	52,00




AZIENDA CON SISTEMA QUALITÀ
CERTIFICATO DA DNV
=UNI EN ISO 9001/2000=



www.itc-funi.com
Funi metalliche
e accessori.

REDANCE THIMBLE


Ed. 21 • 2006



REDANCIA THIMBLE

Similar DIN 6899, form B
Zincata / Galvanized

Campi di utilizzo / Operative range:
Funi industriali / Rope industry.

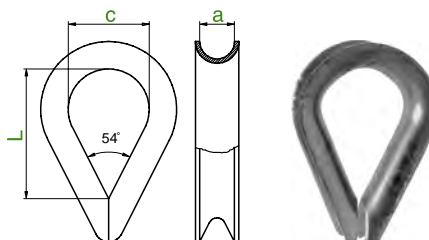

Codice	ø	a	L	c	Kg/%
RDZ00000025	2,5	3	19	12	0,50
RDZ00000035	3,5	4	21	13	0,80
RDZ00000004	4,0	5	23	14	1,00
RDZ00000005	5,0	6	25	16	1,60
RDZ00000006	6,0	7	28	18	1,90
RDZ00000007	7,0	8	32	20	3,00
RDZ00000009	9,0	10	38	24	4,70
RDZ00000011	11,0	12	45	28	6,80
RDZ00000012	12,0	13	48	30	8,00
RDZ00000013	13,0	14	51	32	10,00
RDZ00000015	15,0	16	58	36	14,50
RDZ00000016	16,0	18	64	40	20,00
RDZ00000018	18,0	20	72	45	29,00
RDZ00000020	20,0	22	80	50	32,00
RDZ00000022	22,0	24	90	56	47,00
RDZ00000024	24,0	26	99	62	59,00
RDZ00000026	26,0	28	112	70	80,00
RDZ00000028	28,0	30	120	75	110,00
RDZ00000030	30,0	32	128	80	123,00
RDZ00000032	32,0	34	152	95	156,00
RDZ00000034	34,0	36	160	100	176,00
RDZ00000036	36,0	38	176	110	192,00
RDZ00000038	38,0	40	184	115	292,00
RDZ00000040	40,0	42	192	120	320,00
RDZ00000042	42,0	45	240	150	364,00

Uffici e Magazzino /
Offices and Warehouse
Via al Dos dela Roda - 38057
Z.I. Ciré di Pergine (TN) - Italy
Phone/Tel. +39 0461.538299
Fax +39 0461.539375
EMail: info@itc-funi.com
www.itc-funi.com



AZIENDA CON SISTEMA QUALITÀ
CERTIFICATO DA DNV
=UNI EN ISO 9001/2000=