





www.itc-funi.com  
Funi metalliche  
e accessori.

Ed. 21 • 2006  
AC18

## FUNE in ACCIAIO (WARRINGTON SEALE) ROUND STRAND ROPES

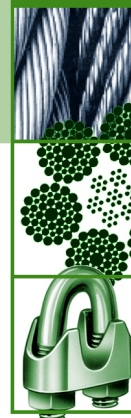

8 x 36 Warrington-Seale  
8 x (1+7+(7+7)+14) + FC  
EN 12385

codice code nr.	Ø nominale della fune nom. diameter mm	peso weight ca. Kg/m	carico min di rottura calcolato calculated aggregate		carico di rottura minimo minimum breaking load	
			1770 N/mm <sup>2</sup> 180 kg/mm <sup>2</sup>		1770 N/mm <sup>2</sup> 180 kg/mm <sup>2</sup>	
			kN	kg	kN	kg
FZ016T288B5	16	0,8909	161,8	16489,7	132,8	13533,6
FZ018T288B5	18	1,1275	204,7	20869,8	168,0	17128,4
FZ020T288B5	20	1,3920	252,8	25765,1	207,4	21146,2
FZ022T288B5	22	1,6843	305,8	31175,8	251,0	25586,9
FZ024T288B5	24	2,0045	364,0	37101,8	298,7	30450,5
FZ026T288B5	26	2,3525	427,2	43543,1	350,6	35737,0
FZ028T288B5	28	2,7283	495,4	50499,7	406,6	41446,5
FZ032T288B5	32	3,5635	647,1	65958,8	531,1	54134,2
FZ036T288B5	36	4,5101	819,9	83479,0	672,1	68513,6
FZ040T288B5	40	5,5680	1011,0	103060,6	829,8	84584,7
FZ044T288B5	44	6,7373	1223,3	124703,3	1004,0	102347,5
FZ048T288B5	48	8,0179	1455,9	148407,2	1194,9	121802,0
FZ052T288B5	52	9,4099	1708,6	174172,3	1402,3	142948,2
FZ056T288B5	56	10,9133	1981,6	201998,7	1626,4	165786,0
FZ060T288B5	60	12,5280	2274,8	231886,2	1867,0	190315,6
FZ064T288B5	64	14,2541	2588,2	263835,0	2124,2	216536,9
FZ068T288B5	68	16,0915	2921,9	297845,0	2398,1	244449,8

FC (FE) = Anima tessile / Fibre core  
WSC (SEL) = Anima metallica / Wire strand core  
IWRC (SES) = Anima metallica composta / Independent wire rope core

Uffici e Magazzino / Offices and Warehouse  
Via al Dos dela Roda - 38057 Z.I. Ciré di Pergine (TN) - Italy  
Phone / Tel. +39 0461.538299 - Fax +39 0461.539375  
EEmail: info@itc-funi.com - Web: www.itc-funi.com

AZIENDA CON SISTEMA QUALITÀ  
CERTIFICATO DA DNV  
=UNI EN ISO 9001/2000=