



www.itc-funi.com
Funi metalliche
e accessori.



FUNE in ACCIAIO (WARRINGTON SEALE) ROUND STRAND ROPES

Ed. 21 • 2006
AC10

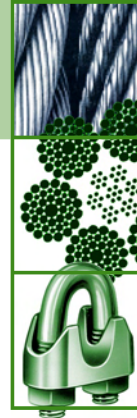

6 x 36 Warrington-Seale
6 x (1+7+(7+7)+14) + FC
EN 12385

codice code	Ø nominale della fune nom. diameter	peso weight	carico min di rottura calcolato calculated aggregate		carico di rottura minimo minimum breaking load	
			1770 N/mm ² 180 kg/mm ²		1770 N/mm ² 180 kg/mm ²	
			kN	kg	kN	kg
nr.	mm	ca. Kg/m				
FZ012T216B5	12	0,5285	100,2	10210,8	84,1	8573,9
FZ013T216B5	13	0,6202	117,6	11983,5	98,7	10062,5
FZ014T216B5	14	0,7193	136,3	13898,0	114,5	11670,1
FZ016T216B5	16	0,9395	178,1	18152,5	149,5	15242,6
FZ018T216B5	18	1,1891	225,4	22974,3	189,2	19291,4
FZ020T216B5	20	1,4680	278,2	28363,3	233,6	23816,5
FZ022T216B5	22	1,7763	336,7	34319,6	282,7	28818,0
FZ024T216B5	24	2,1139	400,7	40843,2	336,4	34295,8
FZ026T216B5	26	2,4809	470,2	47934,0	394,9	40249,9
FZ028T216B5	28	2,8773	545,4	55592,1	457,9	46680,4
FZ032T216B5	32	3,7581	712,3	72610,1	598,1	60970,3
FZ036T216B5	36	4,7563	901,5	91897,1	757,0	77165,5
FZ040T216B5	40	5,8720	1113,0	113453,2	934,6	95266,1
FZ044T216B5	44	7,1051	1346,7	137278,4	1130,8	115271,9
FZ048T216B5	48	8,4557	1602,7	163372,6	1345,8	137183,1
FZ052T216B5	52	9,9237	1880,9	191735,9	1579,4	160999,6
FZ056T216B5	56	11,5091	2181,4	222368,3	1831,7	186721,5

FC (FE) = Anima tessile / Fibre core
WSC (SEL) = Anima metallica / Wire strand core
IWRC (SES) = Anima metallica composta / Independent wire rope core

Uffici e Magazzino / Offices and Warehouse
Via al Dos dela Roda - 38057 Z.I. Ciré di Pergine (TN) - Italy
Phone / Tel. +39 0461.538299 - Fax +39 0461.539375
E-Mail: info@itc-funi.com - Web: www.itc-funi.com

AZIENDA CON SISTEMA QUALITÀ
CERTIFICATO DA DNV
=UNI EN ISO 9001/2000=