





www.itc-funi.com
Funi metalliche
e accessori.

Ed. 21 • 2006
AC11

FUNE in ACCIAIO (WARRINGTON SEALE) ROUND STRAND ROPES

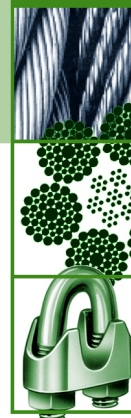

6 x 36 Warrington-Seale
6 X (1+7+(7+7)+14) + IWRC
EN 12385

codice code	Ø nominale della fune nom. diameter	peso weight	carico min di rottura calcolato calculated aggregate		carico di rottura minimo minimum breaking load	
			1770 N/mm ² 180 kg/mm ²		1770 N/mm ² 180 kg/mm ²	
			kN	kg	kN	kg
nr.	mm	ca. Kg/m				
FZ012M216B5	12	0,5890	117,2	11951,6	90,7	9249,5
FZ013M216B5	13	0,6912	137,6	14026,5	106,5	10855,3
FZ014M216B5	14	0,8016	159,6	16267,4	123,5	12589,6
FZ016M216B5	16	1,0470	208,4	21247,2	161,3	16443,5
FZ018M216B5	18	1,3252	263,8	26891,0	204,2	20811,3
FZ020M216B5	20	1,6360	325,7	33198,8	252,0	25693,0
FZ022M216B5	22	1,9796	394,1	40170,5	305,0	31088,5
FZ024M216B5	24	2,3558	469,0	47806,2	362,9	36997,9
FZ026M216B5	26	2,7648	550,4	56105,9	426,0	43421,1
FZ028M216B5	28	3,2066	638,3	65069,6	494,0	50358,2
FZ032M216B5	32	4,1882	833,7	84988,9	645,2	65774,0
FZ036M216B5	36	5,3006	1055,2	107564,0	816,6	83245,2
FZ040M216B5	40	6,5440	1302,7	132795,1	1008,2	102771,9
FZ044M216B5	44	7,9182	1576,3	160682,1	1219,9	124354,0
FZ048M216B5	48	9,4234	1875,9	191225,0	1451,8	147991,5
FZ052M216B5	52	11,0594	2201,6	224423,7	1703,8	173684,5
FZ056M216B5	56	12,8262	2553,3	260278,4	1976,1	201432,9

FC (FE) = Anima tessile / Fibre core
WSC (SEL) = Anima metallica / Wire strand core
IWRC (SES) = Anima metallica composta / Independent wire rope core

Uffici e Magazzino / Offices and Warehouse
Via al Dos dela Roda - 38057 Z.I. Ciré di Pergine (TN) - Italy
Phone / Tel. +39 0461.538299 - Fax +39 0461.539375
E-Mail: info@itc-funi.com - Web: www.itc-funi.com

AZIENDA CON SISTEMA QUALITÀ
CERTIFICATO DA DNV
=UNI EN ISO 9001/2000=