





www.itc-funi.com
Funi metalliche
e accessori.



FUNE in ACCIAIO (WARRINGTON SEALE) ROUND STRAND ROPES

8 x 36 Warrington-Seale
8 X (1+7+(7+7)+14) + IWRC
EN 12385

Ed. 21 • 2006
AC19

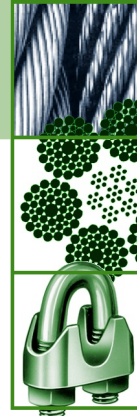

codice code nr.	Ø nominale della fune nom. diameter mm	peso weight ca. Kg/m	carico min di rottura calcolato calculated aggregate		carico di rottura minimo minimum breaking load	
			1770 N/mm ² 180 kg/mm ²		1770 N/mm ² 180 kg/mm ²	
			kN	kg	kN	kg
FZ016M288B5	16	1,0675	212,1	21616,7	161,3	16443,5
FZ018M288B5	18	1,3511	268,4	27358,7	204,2	20811,3
FZ020M288B5	20	1,6680	331,3	33776,1	252,0	25693,0
FZ022M288B5	22	2,0183	400,9	40869,1	305,0	31088,5
FZ024M288B5	24	2,4019	477,1	48637,7	362,9	36997,9
FZ026M288B5	26	2,8189	560,0	57081,7	426,0	43421,1
FZ028M288B5	28	3,2693	649,4	66201,2	494,0	50358,2
FZ032M288B5	32	4,2701	848,2	86466,9	645,2	65774,0
FZ036M288B5	36	5,4043	1073,6	109434,7	816,6	83245,2
FZ040M288B5	40	6,6720	1325,4	135104,6	1008,2	102771,9
FZ044M288B5	44	8,0731	1603,7	163476,6	1219,9	124354,0
FZ048M288B5	48	9,6077	1908,5	194550,6	1451,8	147991,5
FZ052M288B5	52	11,2757	2239,9	228326,8	1703,8	173684,5
FZ056M288B5	56	13,0771	2597,7	264805,0	1976,1	201432,9
FZ060M288B5	60	15,0120	2982,1	303985,3	2268,4	231236,7
FZ064M288B5	64	17,0803	3393,0	345867,7	2581,0	263096,0
FZ068M288B5	68	19,2821	3830,3	390452,3	2913,7	297010,7

FC (FE) = Anima tessile / Fibre core
WSC (SEL) = Anima metallica / Wire strand core
IWRC (SES) = Anima metallica composta / Independent wire rope core

Uffici e Magazzino / Offices and Warehouse
Via al Dos dela Roda - 38057 Z.I. Ciré di Pergine (TN) - Italy
Phone / Tel. +39 0461.538299 - Fax +39 0461.539375
E-Mail: info@itc-funi.com - Web: www.itc-funi.com

AZIENDA CON SISTEMA QUALITÀ
CERTIFICATO DA DNV
=UNI EN ISO 9001/2000=